

Power tillers

# EL 22



[www.kuhn.com](http://www.kuhn.com)



be strong, be **KUHN**

# DESIGNED FOR INTENSIVE USE BY SMALL OPERATORS


The EL 22 range of power tillers is suitable for 15 to 25 hp tractors. Designed with the same rigor as models for professional use, these are machines for the small operator. For your comfort: no oil change needed, no chain tension to check - no maintenance. Accessible hitch, modern pleasing design, quality work output and easy cleaning: The attributes of the EL 22 power tiller will be valued every time you use it.



### NO MAINTENANCE!

The side gearbox needs no special maintenance. From now on forget:

- oil changes
- checking the chain tension!

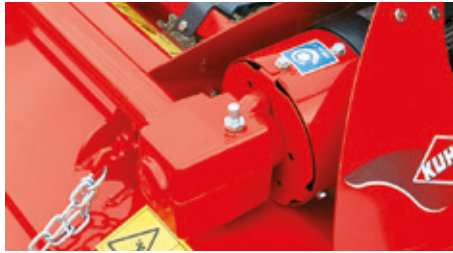

### STRENGTH AND SAFETY

To protect the machine in the event of overload, the transmission is fitted with a limiter as standard. The central gearbox is also maintenance-free.



### LARGE ROTOR

For increased service life, the rotor has a 45 mm diameter solid shaft. The blades efficiently incorporate plant residues. For maximum efficiency: the side blades are mounted towards the outside.

## Technical specifications

## Power tillers

	EL 22-120	EL 22-150
Working width (cm/ft)	126 / 4'1"	147 / 4'8"
Transport width (cm/ft)	164 / 5'4"	185 / 6'1"
Maximum allowable DIN engine power (kW/hp)	19/25	
Minimum PTO power requirement	12/16	13/18
Transmission	with shear bolt safety	
Lateral drive	by ASA 60 HV chain	
Rotor speed at 540 (min <sup>-1</sup> )	241	
Rotor diameter (mm/inches)	390 / 15"	
Min/max working depth (cm/ft)	5(0'2") / 15(0'5")	
Hitch category	0 and 1	
Right hand offset (cm/in)	progressively from 0 to 10 / 0 to 0'3	
Weight with skids (kg/lbs)	153/337	167/368

Optional equipment: transmission with friction slip clutch - quick Hitch with quick couplers

For more information about your nearest  
**KUHN dealer, visit our website**  
**www.kuhn.com**



Visit us  
 on our YouTube channels.



www.kuhn.com

Your KUHN dealer

### KUHN S.A.

4 Impasse des Fabriques - BP 50060  
 F-67706 Saverne CEDEX - FRANCE

### KUHN NORTH AMERICA, INC.

1501 West Seventh Avenue - Brodhead, WI 53520 - USA

### KUHN FARM MACHINERY PTY. LTD

313-325 Foleys Road - Deer Park, VIC, 3023 - AUSTRALIA

### KUHN FARM MACHINERY (U.K.) LTD

Stafford Park 7 - GB TELFORD/ SHROPS TF3 3BQ

Information given in this document is only for information purposes and is non-contractual. Our machines are in compliance with regulations in force in the country of delivery. In our literature, and for improved illustration of certain details, some safety devices may not be in operating position. When operating these machines, these devices must be in position in accordance with the requirements indicated in the operator's manuals and assembly manuals. Respect the tractor gross vehicle weight rating, its lift capacity and maximum load per axle and tyres. The tractor front axle load must always comply with the regulations of the country of delivery (In Europe, it must reach minimum 20 % of the tractor net weight). We reserve the right to change any designs, specifications or materials listed without further notice. Machines and equipment in this document can be covered by at least one patent and/or registered design. Trademarks cited in this document may be registered in one or several countries.

Also find KUHN on

